


COMPARISON CHART

ECHOMAP - SERIES



ECHOMAP Plus 42cv w/o xdcr
ECHOMAP Plus 42cv w/ GT20

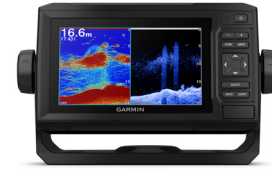

ECHOMAP UHD 62cv w/o xdcr
ECHOMAP UHD 62cv w/ GT24 UHD




ECHOMAP UHD 72cv w/o xdcr
ECHOMAP UHD 72cv w/ GT24 UHD




ECHOMAP UHD 72sv w/o xdcr
ECHOMAP UHD 72sv w/ GT56 UHD



ECHOMAP UHD 92sv w/o xdcr
ECHOMAP UHD 92sv w/ GT56 UHD

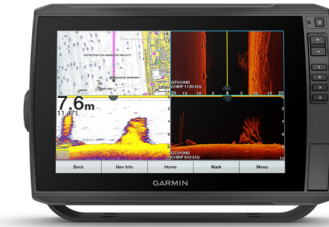

ECHOMAP ULTRA 102sv w/o xdcr
ECHOMAP ULTRA 102sv w/ GT56 UHD

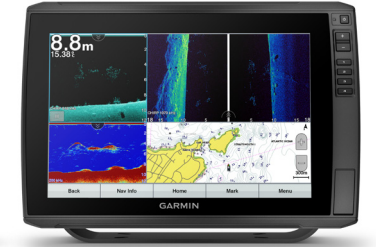


ECHOMAP ULTRA 122sv w/o xdcr
ECHOMAP ULTRA 122sv w/ GT56 UHD

DISPLAY SIZE	4.3"	6.2"	7"	7"	9"	10"	12"
DISPLAY TYPE & RESOLUTION	QVGA 272x480 px	WVGA 800x480 px	WVGA 800x480 px	WVGA 800x480 px	WVGA 800x480 px	WXGA 1280x800 px	WXGA 1280x800 px
TOUCH OR KEYED PANEL	Keyed	Keyed	Keyed Assist Multitouch	Keyed Assist Multitouch	Keyed Assist Multitouch	Keyed Assist Multitouch	Keyed Assist Multitouch
IPS DISPLAY						•	•
PHYSICAL DIMENSIONS	10.2 x 16.5 x 0.4 cm	21.8 x 13.0 x 6.2cm	25 x 13.9 x 5.1 cm	25 x 13.9 x 5.1 cm	28.2 x 16.4 x 6.0 cm	29.5 x 19.5 x 9.8 cm	34.1 x 22.9 x 9.8 cm
RECEIVER	5 Hz	5 Hz	5 Hz	5 Hz	5 Hz	10 Hz	10 Hz
NMEA 2000		•	•	•	•	•	•
NMEA 0183	•	•	•	•	•	•	•
GARMIN MARINE NETWORK			• 1 port For Internal Sonar Sharing (7" and 9" UHD and Ultra only) or Panoptix	• 1 port For Internal Sonar Sharing (7" and 9" UHD and Ultra only) or Panoptix	• 1 port For Internal Sonar Sharing (7" and 9" UHD and Ultra only) or Panoptix	• 2 ports For Internal Sonar Sharing (7" and 9" UHD and Ultra only) & Panoptix	• 2 ports For Internal Sonar Sharing (7" and 9" UHD and Ultra only) & Panoptix
GARMIN RADAR COMPATIBLE							
AIS & DSC SUPPORT	•	•	•	•	•	•	•
BLUECHART® g3 & g3 Vision COMPATIBLE	•	•	•	•	•	•	•
CHIRP	•	•	•	•	•	•	•
CLEARVÜ	•	•	•	•	•	•	•
SIDEVÜ				•	•	•	•
UHD SCANNING SONAR		•	•	•	•	•	•
TRANSDUCER PIN NUMBERS	4 PIN	4 PIN	12 PIN	12 PIN	12 PIN	12 PIN & LVS12	12 PIN & LVS12
PANOPTIX™ SUPPORT		•	•	•	•	•	•
WIFI® CONNECTIVITY		•	•	•	•	•	•
ANT™ CONNECTIVITY						•	•
FUSION-Link™		•	•	•	•	•	•

COMPARISON CHART


STRIKER - SERIES



STRIKER 4 w/ Dual Beam xdcr



STRIKER Plus 4cv w/ Dual Beam xdcr




STRIKER Vivid 4cv w/ GT20



STRIKER Vivid 5cv w/o xdcr
STRIKER Vivid 5cv w/ GT20



STRIKER Vivid 7cv w/ GT20

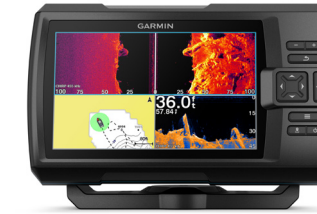

STRIKER Vivid 7sv w/o xdcr
STRIKER Vivid 7sv w/ GT52



STRIKER Vivid 9sv w/o xdcr
STRIKER Vivid 9sv w/ GT52

DISPLAY SIZE	3.5"	4.3"	4.3"	5"	7"	7"	9"
DISPLAY TYPE & RESOLUTION	HVGA 320x480 px	QSVGA 272x480 px	QSVGA 272x480 px	WVGA 800x480 px	WVGA 800x480 px	WVGA 800x480 px	WVGA 1280x800 px
TOUCH OR KEYED PANEL	Keyed	Keyed	Keyed	Keyed	Keyed	Keyed	Keyed
PHYSICAL DIMENSIONS	9.2 x 15.1 x 4.3 cm	9.8 x 17.4 x 4.5 cm	9.8 x 17.4 x 4.5 cm	18.8 x 11.6 x 5.4 cm	23.5 x 14.0 x 5.8 cm	23.5 x 14.0 x 5.8 cm	28.2 x 16.5 x 6.0 cm
RECEIVER	5 Hz	5 Hz	5 Hz	5 Hz	5 Hz	5 Hz	5 Hz
VIVID COLOUR PALETTE			•	•	•	•	•
NMEA 0183	•	•	•	•	•	•	•
USER DATA SHARING COMPATIBLE	•	•	•	•	•	•	•
WIFI® CONNECTIVITY				•	•	•	•
BUILT-IN QUICKDRAW	•	•	•	•	•	•	•
BUILT-IN FLASHER	•	•	•	•	•	•	•
BLUECHART® g3 & g3 Vision COMPATIBLE							
DUAL FREQUENCY (50/200 kHz)	•	•	•	•	•	•	•
DUAL BEAM (77/200 kHz)	•	•	•	•	•	•	•
CHIRP	•	•	•	•	•	•	•
CLEARVÜ		•	•	•	•	•	•
SIDEVÜ						•	•
FREQUENCIES SUPPORTED (kHz)	Traditional: 50/77/200 CHIRP (Low, Mid, High)	CHIRP 77/200 kHz ClearVu (455/800 kHz)	CHIRP 77/200 kHz ClearVü (455/800 kHz)	CHIRP (77/200 kHz) ClearVü (455/800 kHz)	CHIRP (77/200 kHz) ClearVü (455/800 kHz)	CHIRP (77/200 kHz) ClearVü/SideVü (455/800 kHz)	High-Wide CHIRP (150-240 kHz) ClearVü/SideVü (455/800 kHz)
TRANSMIT POWER (INK TRANSDUCER)	200 W Trad	300 W Trad 300 W ClearVü	300 W Trad 300 W ClearVü	500 W Trad 500 W ClearVü	500 W Trad 500 W ClearVü	500 W Trad 500 W ClearVü	250 W Trad 350 W ClearVü/SideVü
PANOPTIX™ SUPPORT							